

USER MANUAL

The logo for Vision SYSTEM, featuring the word "Vision" in a stylized font with a colorful arc above it, and "SYSTEM" in a smaller font below it.



TANDEM10-VF

3G/HD/SD audio embedder/de-embedder

The Crystal Vision logo, consisting of the words "Crystal" and "Vision" in a blue serif font, with a colorful rainbow triangle pointing downwards between them.

Contents

1	Introduction	3
2	Hardware installation	5
2.1	Piggyback boards	5
	3G-AIP2 Analogue Input	6
	3G-AOP2 Analogue Output	6
	DIOP4 AES I/O	7
	Legal combinations	7
	Fitting the I/O piggybacks onto the main board	7
3	Rear modules and signal I/O	8
3.1	Rear module connections with VR02	8
3.2	Rear module connections with VR12	9
3.3	Rear module connections with VR13	10
3.4	VR02 and VR12 audio pin-out	11
4	Control and Status monitoring	12
4.1	Controlling cards via VisionWeb	12
4.2	Control Descriptions	12
4.3	Status	13
	Video	13
	Audio status	14
	Sub PCB type	14
4.4	Video	15
	Delay & output	15
	RGB proc	16
	YUV proc	16
	VANC	17
	Fibre enable	17
4.5	Audio	18
	DeEmbedded input	18
	Discrete inputs	19
	Audio gain	20

	DeEmbedded input delay	21
	Discrete input delay	22
	User delay	23
	AES I/O configure	23
4.6	Audio Router	24
	Embedded output router	24
	Discrete output router	25
	Mute & group enable	26
4.7	Presets, default, alarms	27
	Presets	27
	Card default	27
	Alarm delays	28
4.8	'Live' button	29
5	Troubleshooting	30
5.1	Card edge monitoring	30
5.2	Basic fault finding guide	30
6	Specification	31
7	Appendix 1	33
7.1	Menu Structure	33












1 Introduction


TANDEM10-VF provides a versatile solution for audio embedding and de-embedding for use with Vision rack frames from Crystal Vision. It has a single SDI video path with a de-embedder and an embedder which allow the extraction and insertion of up to 16 channels (four groups) of audio.

Embedded audio signals can be extracted and output as analogue or AES, then resampled and re-embedded into the video signal in the same or different channel position with user-controlled gain and delay. Additionally, external analogue and AES audio inputs can be embedded into the video signal in any channel position.

There are two slots for optional analogue and digital I/O piggybacks of which there are three types: 3G-AIP2, 3G-AOP2 and DIOP4. The 3G-AIP2 piggyback has four analogue inputs; 3G-AOP2 has four analogue outputs; DIOP4 has four stereo AES pairs – each pair can be individually configured as an input or output. Any type of piggyback can be fitted into any of the two slots to provide the desired mixture of analogue and AES, inputs and outputs.

The main features are as follows:

-  **Use with any source:** works with 3Gb/s, HD and SD.
-  **Supports the following video standards:** 625, 525, 720p50, 720p59.94, 1080i50, 1080i59.94, 1080p50, 1080p59.94, 1080psf23.98, 1080psf24.
-  **Versatile audio:** will de-embed and embed up to four audio groups and input or output up to eight external AES stereo pairs or four analogue stereo pairs which can be fully shuffled with the powerful 32 x 16 audio routers.
-  **Optimise the video:** video proc-amp allows adjustment of lift and gain in RGB and YUV domain. **TANDEM10-VF** features a switchable 0-10 frame video delay – useful for matching Dolby E or other audio processing delays.
-  **Optimise the audio:** each channel has individual gain control and stereo to mono conversion. The audio level can be increased or decreased to match the rest of the system: each mono audio channel offers individual gain control, adjustable between +18dB and -18dB in 0.1dB steps. Audio channels can be muted and stereo pairs converted to mono. PCM Audio channels can be delayed with respect to the video by a fixed amount of up to 400mS.
-  **Control of TANDEM10-VF** is most easily achieved by Crystal Vision's VisionWeb PC software. Control can additionally be from an active front panel on the Vision frame, remote VisionPanel or SNMP.
-  **Optical connectivity:** send signals beyond the local equipment bay with the fibre input and output options.
-  **VANC** blanking option.
-  **Supports the following Vision Rear Modules:** VR02, VR12 and VR13.
-  **Compatible** with 'Vision' frames from Crystal Vision.
-  **Passes** all timecode, AFD and subtitling information.

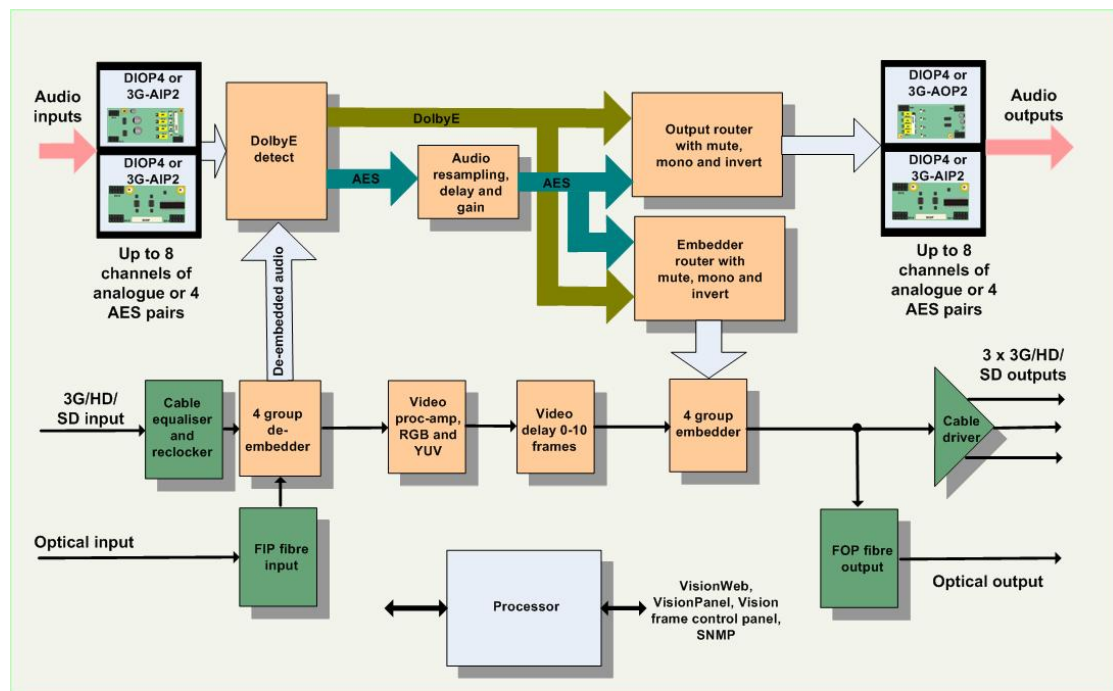

TANDEM10-VF functional block diagram

Block Diagram Description

SDI video is cable-equalised, re-clocked and passed through a de-embedder block where up to 16 channels of audio are extracted. The video signal is then processed allowing for adjustment of video gain, black level and independent RGB and YUV gains. This is followed by up to ten video frames of delay before the video is then passed to the embedder block where up to 16 audio channels are inserted.

De-embedded audio and external input audio are processed with resampling, delay and gain. Dolby E encoded signals bypass this process. After processing, the audio is passed to two independent 32 x 16 routers which feed both the optional plug-in output piggybacks and the embedding block. In this way any of the 32 input audio channels sources can be output externally or embedded.

2 Hardware installation

All of the links and potentiometers on the card are factory set and should **NOT** be adjusted.

TANDEM10-VF cards are intended for use **only** in the Crystal Vision 'Vision' frame range and not in older style frames such as 'Indigo'.


The card should be inserted and removed from the Vision frame by gently pushing or pulling the metal ring at the bottom of the card, being careful to ensure the card is inside the guide rails. Do not force the card if resistance is met as the card may not be correctly aligned with the rear connectors. The white tab at the top of the board is a label only and should not be pulled.

Ensure that the Vision frame has the correct rear module fitted. Only the VR02, VR12 and VR13 rear modules offer the correct input/output functionality for this card.

2.1 Piggyback boards


The TANDEM10-VF card has two positions where one of three types of piggy-backed I/O module can be plugged to enable analogue or digital input and output.

The three types of piggybacks are 3G-AIP2, 3G-AOP2 and DIOP4.

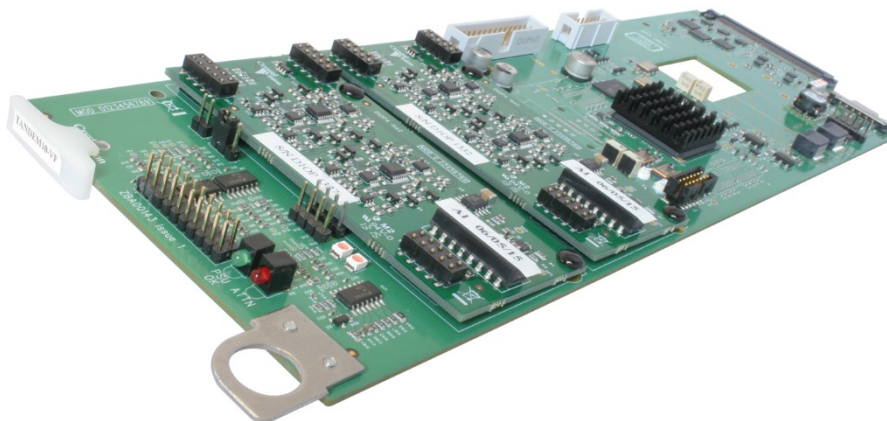

TANDEM10-VF card with two piggyback boards fitted

3G-AIP2 Analogue Input

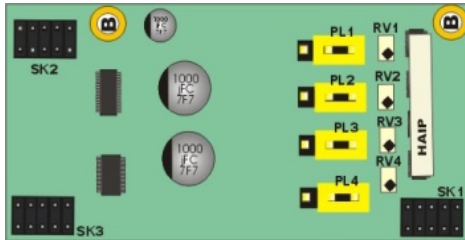


This analogue module has four balanced audio inputs. The links PL1-4 allow 0dBFS to be set to +18dBu (to the right, towards SK1) or +24dBu (to the left, towards SK2/3). The adjacent potentiometers RV1-4 are factory set and should **NOT** be adjusted.

3G-AIP2 channel number	Link number
CH1	PL1
CH2	PL2
CH3	PL3
CH4	PL4

Table showing links controlling the input gain of the 3G-AIP2 channels

3G-AOP2 Analogue Output

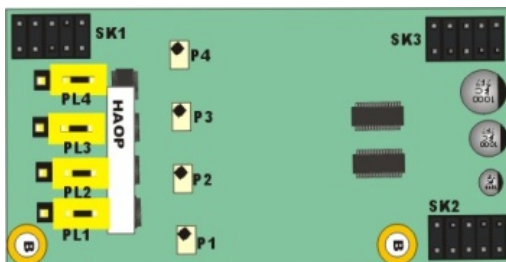


This analogue piggyback has four balanced audio outputs. The links PL1-4 set 0dBFS to +18dBu (to the right, towards SK2/3) or +24dBu (to the left, towards SK1). The four potentiometers P1-P4 are factory set and should **NOT** be adjusted.

3G-AOP2 channel number	Link number
CH1	PL1
CH2	PL2
CH3	PL3
CH4	PL4

Table showing links controlling the output gain of the 3G-AOP2 channels

DIOP4 AES I/O

This digital audio piggyback has four AES stereo pairs that are individually configured as inputs or outputs by software. There are no links or user-adjustments on this card.

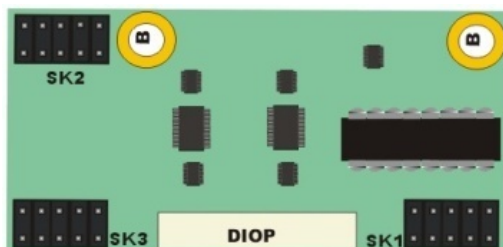


Legal combinations

Not all combinations of piggyback boards are allowed. The following table shows the only legal combinations that can be fitted into front (nearest handle) and rear (nearest edge connector) positions:

FRONT	none	DIOP 4	3G-AIP2	3G-AOP2	DIOP 4	DIOP 4	DIOP 4	3G-AIP2	3G-AIP2	3G-AOP2
REAR	none	none	none	none	DIOP 4	3G-AIP2	3G-AOP2	3G-AIP2	3G-AOP2	3G-AOP2

Fitting the I/O piggybacks onto the main board

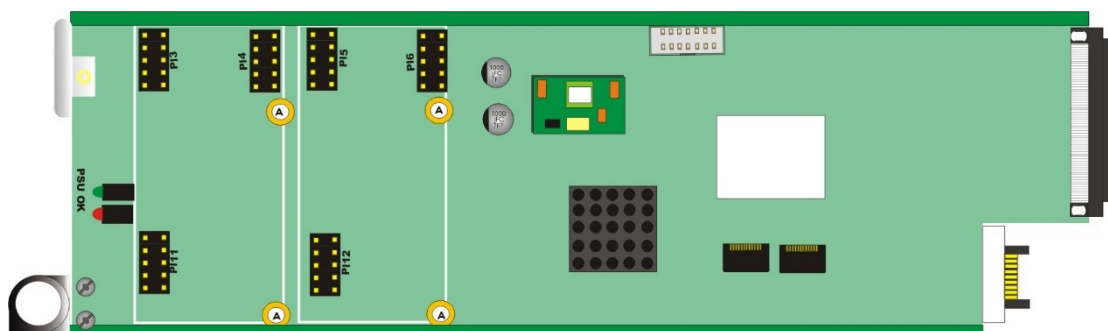

TANDEM10-VF main board showing piggyback fixing holes and sockets

The I/O piggybacks plug onto the main board such that main board plugs PL6, PL5, PL12 and PL4, PL3, PL11 align with piggyback sockets SK2, SK3, SK1. With the component side of the module top-most, align the piggyback sockets carefully with the plugs and push firmly. Insert the plastic rivets supplied with the fitting kit through the main board (holes 'A') from the underside so they protrude through the piggyback board, then push the rivet peg firmly to splay the end to lock the piggyback board in position. **Note: The position that the piggyback is fitted determines the function of the rear module connectors. See [Rear modules and signal I/O](#) for more information.**


3 Rear modules and signal I/O

The Vision 3 frame will house up to 20 single height modules and dual power supplies or ten double height modules. All modules can be plugged in and removed while the frame is powered without damage.

Note: For details of fitting rear connectors please refer to the appropriate frame manual.

The TANDEM10-VF can support the following rear modules: **VR02**, **VR12**, and **VR13**.

3.1 Rear module connections with VR02

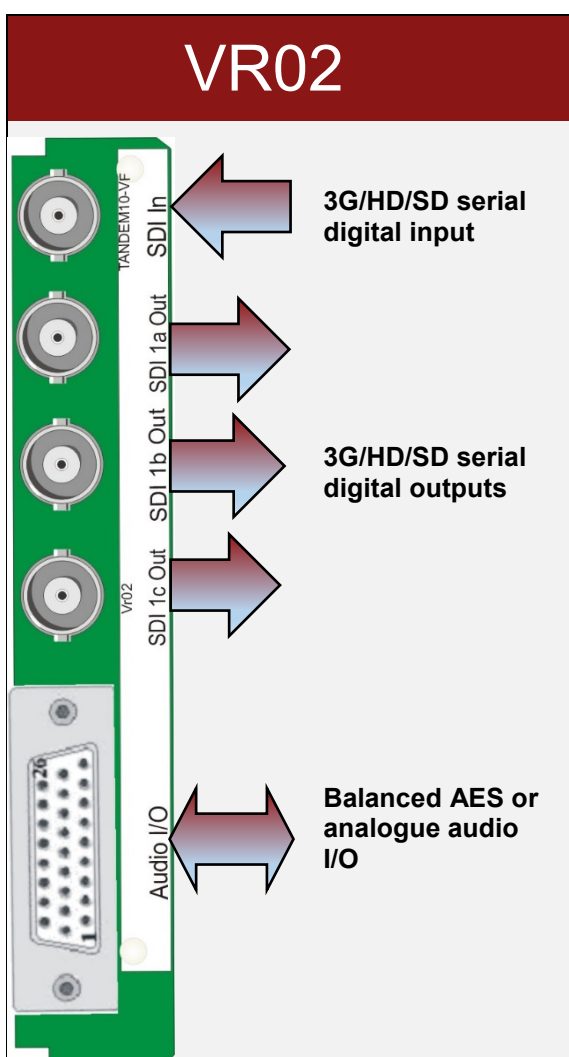


The VR02 single-slot rear module allows maximum packing density with the maximum number of inputs and outputs available. The VR02 has one 3G/HD/SD serial digital BNC video input and three 3G/HD/SD serial digital BNC video outputs. The D-Type connector allows eight AES stereo pairs or eight mono analogue channels as balanced I/O.

The 26-way high-density audio 'D' socket on the VR02 module can be used for analogue or digital, inputs or outputs – or a mixture of both depending on the I/O piggybacks fitted. Half of the I/O channels on the rear module are connected to the front I/O (nearest handle) piggyback position and the remainder to the rear. The DIOP4 will normally be configured as 110 ohm balanced operation when using this rear module.

Up to 20 VR02 rear modules can fit into a Vision 3 frame.

3.2 Rear module connections with VR12

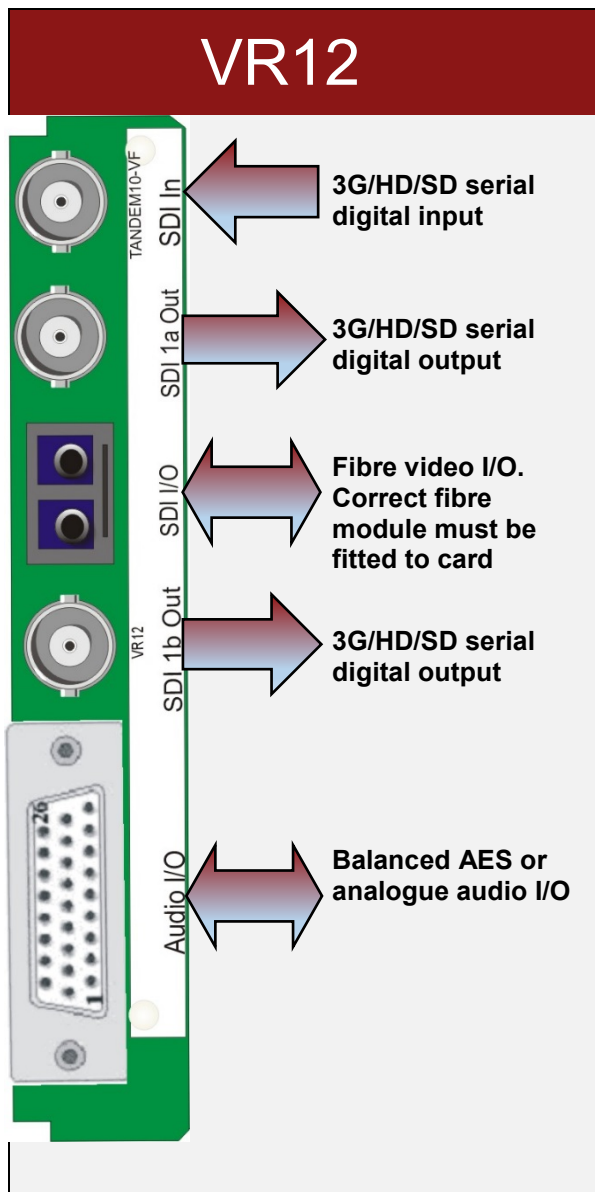


The VR12 single-slot rear module has one 3G/HD/SD serial digital video input plus two 3G/HD/SD serial digital video outputs on BNC and eight AES stereo pairs or eight mono analogue channels as balanced I/O on the D-Type connector. The dual fibre I/O can be configured as a video input, a video output or a video input and output depending on the fibre modules fitted to the TANDEM10-VF card.

The 26-way high-density audio 'D' socket on the VR12 module can be used for analogue or digital, inputs or outputs – or a mixture of both depending on the I/O piggybacks fitted. Half of the I/O channels on the rear module are connected to the front I/O (nearest handle) piggyback position and the remainder to the rear. The DIOP4 will normally be configured as 110 ohm balanced operation when using this rear module.

Up to 20 VR12 rear modules can fit into a Vision 3 frame.

3.3 Rear module connections with VR13

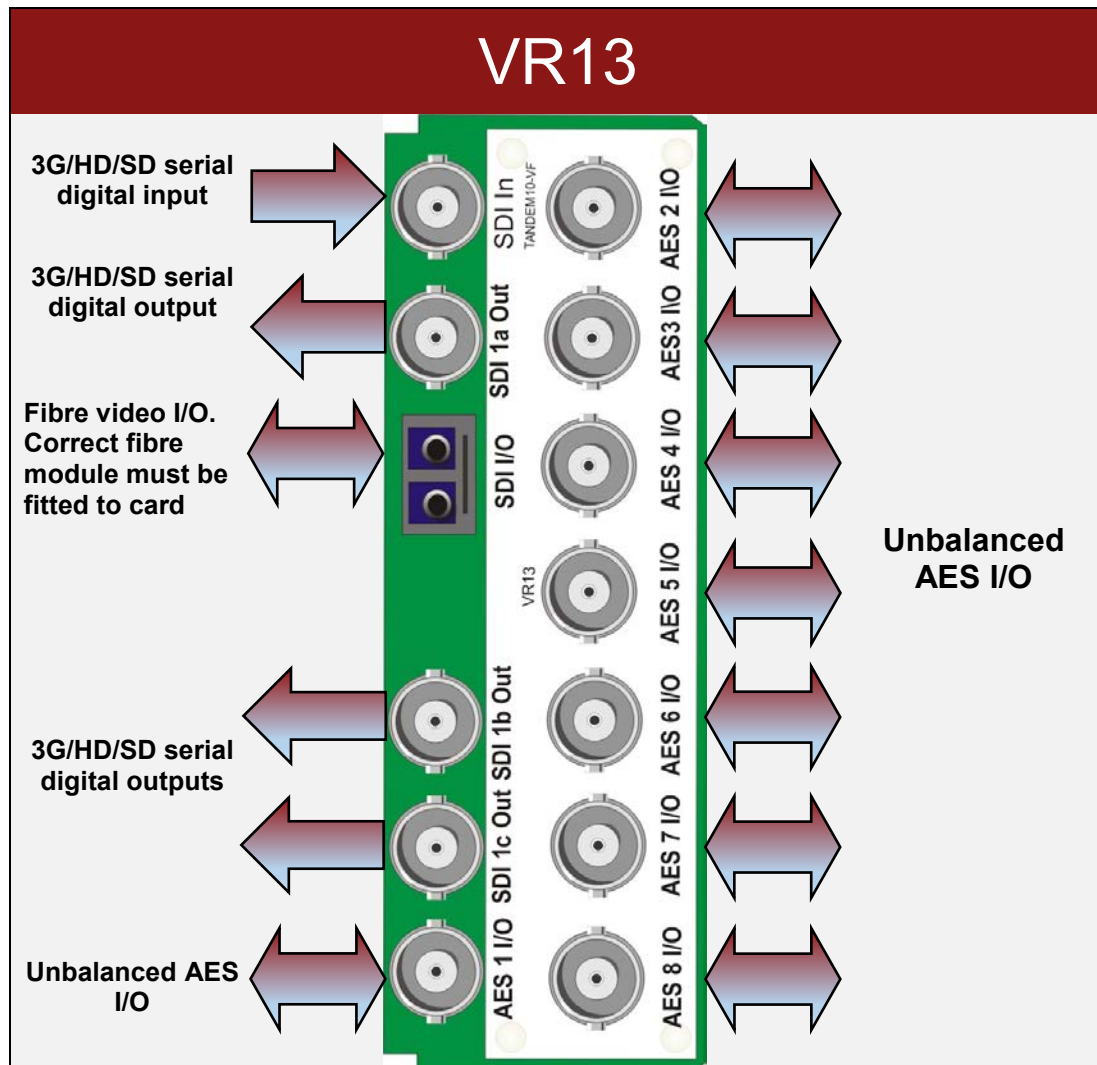

The VR13 double-slot module has BNC connectors for eight channels (stereo pairs) of unbalanced AES audio. One 3G/HD/SD serial digital video input plus three 3G/HD/SD serial digital video outputs on BNC. The dual fibre I/O can be configured as a video input, a video output or a video input and output depending on the fibre modules fitted to the TANDEM10-VF card.

AES I/O channels 1-4 on the rear module are connected to the front I/O (nearest handle) piggyback position and the remainder to the rear. DIOP4 piggyback(s) must be used as there is no provision for analogue audio, and will normally be configured for 75 ohm unbalanced operation.

When using this rear module, the TANDEM10-VF card must be fitted into the right hand slot position when viewed from the front of the frame.

Up to ten VR13 rear modules can fit into a Vision 3 frame.

3.4 VR02 and VR12 audio pin-out

The 26-way high-density audio 'D' connector on the VR02 and VR12 modules can be used for analogue or digital, inputs or outputs – or a mixture of both depending on the I/O piggybacks fitted. Half of the I/O channels on the rear module are connected to the front I/O (nearest handle) piggyback position and the remainder to the rear. The DIOP4 will normally be configured as 110 ohm balanced operation when using these rear modules.

Piggyback position	Function		Pin-out
	GND		1
Front	Analogue audio 1/ AES1	{ +	2
		{ -	3
	Analogue audio 2/ AES2	{ +	4
		{ -	5
	Analogue audio 3/ AES3	{ +	6
		{ -	7
	Analogue audio 4/ AES4	{ +	8
		{ -	18
	GND		9
Rear	Analogue audio 5/ AES5	{ +	14
		{ -	15
	Analogue audio 6/ AES6	{ +	10
		{ -	11
	Analogue audio 7/ AES7	{ +	16
		{ -	17
	Analogue audio 8/ AES8	{ -	12
		{ +	13
	GND		19, 20, 23, 24
	NC		21, 22, 25, 26


VR02 and VR12 audio I/O connector wiring – All audio balanced signals can be either input or output depending on I/O module fitted.

4 Control and Status monitoring

TANDEM10-VF status and controls can be accessed most easily by 'VisionWeb' remote control PC software but also by VisionPanel, the Vision frame's front panel and SNMP.

4.1 Controlling cards via VisionWeb

Accessing the 'Vision' frame homepage with a PC browser via the Ethernet connector of a frame will display a list of the cards fitted. (See 'Vision' frame User Manual for more details.)

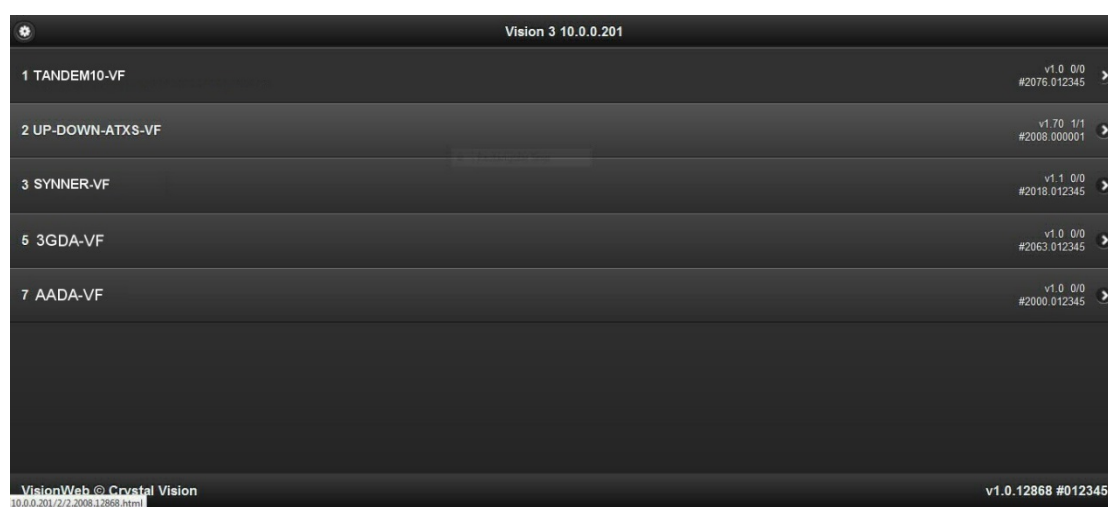

Typical Vision frame home page

The example above shows a TANDEM10-VF card fitted in slot 1 and other Vision cards in slots 2, 3, 5 and 7. Clicking on the TANDEM10-VF card will bring up the card's **Status** page, for example:



TANDEM10-VF Status Page

4.2 Control Descriptions

Crystal Vision cards use an XML file to create a control database that is common to all controllers. Although the description of controls used in this manual is based on VisionWeb GUI screen grabs, the menu tree for VisionPanel and Vision frame front panel operation is the

same, although the appearance and labelling of some controls may vary according to the available space. See [Menu Structure](#) for a more detailed menu tree.

VisionWeb GUI controls are accessed by tabs at the bottom of the page: **Status, Video, Audio, Audio router and Presets, default, alarms**. These tabs, when selected, offer menus containing a number of controls. Some controls are simulated LEDs that are used to show status, others are check boxes, buttons or sliders which change various TANDEM10-VF settings.

What follows are VisionWeb menu screenshots with a description of each control's function. Note that VisionWeb adjusts the number and type of controls displayed to suit the piggybacks fitted, so screen grabs may not correspond exactly to a user's own configuration.

The description of the menus is in the order displayed in the VisionWeb GUI:

Video, Audio, Sub PCB type, Delay & output, RGB proc, YUV proc, VANC, Fibre enable, DeEmbedded input, Discrete inputs, Audio gain, DeEmbedded input delay, Discrete input delay, User delay, AES I/O configure, Embedded output router, Discrete output router, Mute & group enable, Presets, Card defaults, Alarm delays.

4.3 Status

Video	
Display presence, standard and status of incoming video signal.	
Present	On when input video is present.
Format	Displays video standard of incoming video i.e. 1080i 50, 1080p 50, 720p 50, 625, 525 etc.
Black	On if video input is permanently at black level.
Frozen	On if video input is a permanent still frame.

Audio status

Displays presence of audio embedded in incoming and outgoing video signal.



Input audio groups - Present

On when audio group detected in incoming video.

Output audio groups - Present


On when audio group enabled in outgoing video.

All silent

On if the sound level of all the channels of all the groups is consistently below the threshold set by the 'Audio silence level' control for the time period set by the 'Audio silence (seconds) control. Both of these controls are in the [Presets, default, alarms](#) menu.

Sub PCB type

Displays type of piggybacks fitted. In the example below, a DIOP4 piggyback is fitted in the front position and a 3G-AOP2 in the rear.

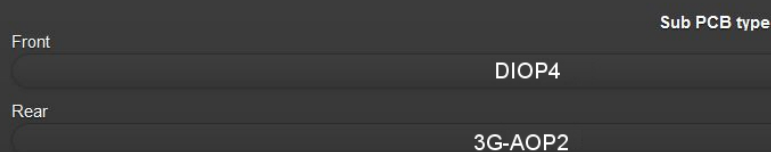

Front

Displays type of piggyback in front position (nearest handle) i.e. DIOP4, 3G-AIP2, 3G-AOP2 or none.

Rear

Displays type of piggyback in rear position (nearest edge connector) i.e. DIOP4, 3G-AIP2, 3G-AOP2 or none.

4.4 Video

Delay & output

Set up frame delay and loss of input output.

Format to modify

Delay

1920x1080i 50Hz

Input Loss

On loss of input show

Output blue

Frames

1

Apply to all formats

Format to modify

525i

625i

1280x720p 50Hz

12890x720p 59.94Hz

1920x1080i 50Hz

1920x1080i 59.94Hz

1920x1080PsF 23.98Hz

1920x1080PsF 24Hz

1920x1080p 50Hz

1920x1080p 59.94Hz

Select to which input standard the fixed delay should only be applied to. Other input standards are unaffected.

Frames

Select a delay of between 0-10 video frames for the video path. As the audio path is not affected by this delay, this control will delay the video with respect to the audio. Audio channels will be delayed by the same amount if 'Match video frame delay' is selected by the *DeEmbedded input delay* or *Discrete input delay* controls.

Apply to all formats

Selecting this will apply the currently displayed delay to all possible input video formats.

On Loss of Input Show

No output

Output blue

Output black

In the event of the input signal missing, choose which picture to output. The 'No output' option will also shut down the fibre optic output, if fitted.

RGB proc

Apply varying amounts of lift and gain to the Red, Green and Blue channels of the video path.

Red/Green/Blue Lift

Apply a positive or negative DC offset to the black level of the Red, Green and Blue components of the video path.

Red/Green/Blue Gain

Apply 80% to 120% gain to the Red, Green and Blue components of the video path.

Default

Return Lift and Gain for all components to their calibrated values of 0 lift and 100% gain.

YUV proc

Apply varying amounts of lift and gain to the YUV channels of the video path.

Y/U/V Lift

Apply a positive or negative DC offset to the black level of the Y, U and V components of the video path.

Y/U/V Gain

Apply 0 to 200% gain to the Y, U and V components of the video path.

Video Gain

Apply 0 to 200% overall gain to the video path.

YUV default

Return Lift and Gain for all components to their calibrated values of 0 lift and 100% gain.

VANC

Blank ancillary data.

VANC blank

VANC blank

VANC blank


Select to blank the vertical ancillary data in the video signal vertical interval.

Fibre enable

Select optical or BNC as the video source. Enable fibre output and display laser fail warnings.

<p>Source</p> <p style="text-align: center;">Input</p> <p style="text-align: center;">Fibre</p> <p>Received power</p> <p style="text-align: center;">-23</p> <p>Power level</p> <p style="text-align: center;">Too low</p>	<p style="text-align: center;">Output</p> <p><input checked="" type="checkbox"/> Enable</p> <p>Level warning <input checked="" type="radio"/></p> <p>Bias warning <input type="radio"/></p>
--	---

Source



Select fibre or BNC as the video input source. FIP-VF or FIO-VF module must be fitted for fibre input.

Received power

Displays received optical power in dBm in the range -25 to 0dBm in 1dBm steps.

Power level

Displays one of the following depending on the received power level: 'OVERLOAD', 'HIGH', 'GOOD', 'LOW', 'TOO LOW'. 'OVERLOAD' or 'HIGH' may cause the receiver to saturate with poor or no video output. In extreme cases the receiver may even be damaged – consider using an optical attenuator or a longer fibre cable.

'TOO LOW' or 'LOW' may be the result of dirty optical connectors – if in doubt, clean. Excessive fibre cable runs will also cause these warnings. Although transmission distances of up to 50km is possible with single-mode fibre, this distance is dependent on minimal attenuation from junctions etc. Multi-mode fibre installations can expect considerably shorter transmission distances. Single-mode fibre, or any single-mode components should never be used downstream of multi-mode fibre.

Enable	Enable fibre optic output if FOP-VF or FIO-VF module fitted.
Level warning	On if the laser is producing low output power. This indicates that the laser has failed and should be replaced immediately.
Bias warning	On if the laser bias current has risen above a threshold which indicates imminent failure of the device. The laser should be replaced as soon as possible.

4.5 Audio

DeEmbedded input

Monitor de-embedder channel status, invert channels, detect Dolby E encoded channel pairs, mono and resample stereo pairs.


	Present	Silent	Invert	DolbyE	Mono	Resample
Group 1 C1	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Group 1 C2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group 1 C3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
Group 1 C4	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group 2 C5	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Group 2 C6	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group 2 C7	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group 2 C8	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group 3 C9	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group 3 C10	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group 3 C11	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group 3 C12	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group 4 C13	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group 4 C14	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group 4 C15	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Group 4 C16	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Present	On when embedded channel detected.
Silent	On if the audio channel is silent i.e. consistently below the threshold set by the 'Audio silence level' control for a period set by the 'Audio silence (seconds)' control – see Alarm delays .
Invert	Select to enable inversion of the de-embedder output for the selected channel.

Dolby E	On if the channel pair has Dolby E encoding.
Mono	Select to mono the channel pair. <i>N.B. Only the first channel of the stereo pair is converted to mono, the second channel is unchanged. The mono output is gain corrected to maintain unity gain.</i>
Resample	Select to enable resampling of the selected stereo pair output from the de-embedder. Resampling is used to seamlessly match the timing of audio signals when the user-controlled delay is altered and is the default condition. If resampling is deselected it is essential that the input and output source is derived from the same source and the timing should not be adjusted while on air. Without resampling, an adjustment in timing will cause a number of audio samples to be dropped or repeated. As Dolby E signals cannot be resampled, the control will be ignored.

Discrete inputs

Monitor external analogue or AES input channel status, invert channels, detect Dolby E encoded channel pairs, mono and resample stereo pairs. Screen grab below shows a DIOP4 in the front piggyback position with eight digital inputs.

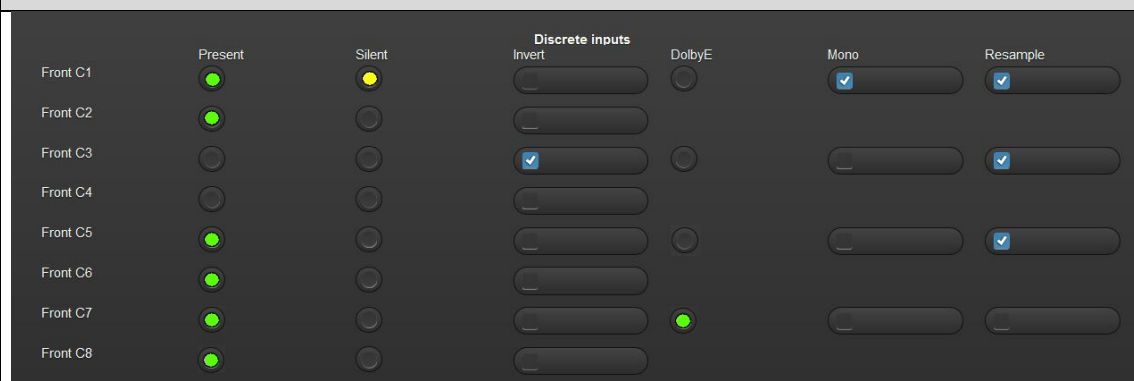

Present	On when embedded channel detected.
Silent	On if the audio channel is silent i.e. consistently below the set threshold.
Invert	Select to enable inversion of the de-embedder output for the selected channel.
Dolby E	On if the channel pair has Dolby E encoding (AES inputs only).

Mono	<p>Select to mono the channel pair. <i>N.B. Only the first channel of the stereo pair is converted to mono, the second channel is unchanged. The mono output is gain corrected to maintain unity gain.</i></p>
Resample	<p>Select to enable resampling of the selected stereo pair output from the de-embedder. Resampling is used to seamlessly match the timing of audio signals when the user-controlled delay is altered and is the default condition. If resampling is deselected it is essential that the input and output source is derived from the same source and the timing should not be adjusted while on air. Without resampling, an adjustment in timing will cause a number of audio samples to be dropped or repeated. As DolbyE signals cannot be resampled, the control will be ignored.</p>

Audio gain

Change the gain of the audio inputs by +/- 18dB.

Select channels Channel gain Group 1 C1 to C4

Gain 1(dB) -12.0

Gain 2(dB) -5.4

Gain 3(dB) 0

Gain 4(dB) 8.3

Default audio gain

Gain 1-4 (dB)

In total there are 32 audio gain controls, one for each of the 16 channels of de-embedded audio and 16 channels of external audio. The gain controls will give $\pm 18\text{dB}$ of gain relative to the input level up to the point where digital clipping will occur.

Select channels

Group 1 C1 to C4

Group 2 C5 to C8

Group 3 C9 to C12

Group 4 C13 to C16

Front Diop C1 to C4

Front Diop C5 to C8

Select the group of channels to control. The options available will depend on the option sub-boards fitted. The screen grab shown here is for a single DIOP4 piggyback fitted in the front position offering eight AES inputs.

Default Audio Gain

Select to return all channels to the default gain level.

DeEmbedded input delay

These controls can be used to match the video 0 to 10 frame delay, or to delay the de-embedded audio with respect to the video and compensate for any delay between the incoming video and audio signals.

	Present	Frame & user	
		Match video frame delay	User delay
Group1 C1+C2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="text"/>
Group1 C3+C4	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="text"/>
Group2 C5+C6	<input checked="" type="checkbox"/>	<input type="text"/>	<input checked="" type="checkbox"/>
Group2 C7+C8	<input checked="" type="checkbox"/>	<input type="text"/>	<input checked="" type="checkbox"/>
Group3 C9+C10	<input type="checkbox"/>	<input type="text"/>	<input type="text"/>
Group3 C11+C12	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="text"/>
Group4 C13+C14	<input type="checkbox"/>	<input type="text"/>	<input type="text"/>
Group4 C15+C16	<input type="checkbox"/>	<input type="text"/>	<input type="text"/>

Present

On if the audio channel pair is present.

Match video frame delay

For each channel pair, select to enable delay to match the video frame delay set by the *Delay & output* controls.

User delay

For each channel pair, select to enable the variable delays set by the *User delay* controls. For PCM signals this is -20 to +400mS. *N.B. Negative values of delay can only be set if at least one frame of video delay selected.*

Discrete input delay

These controls can be used to match the video 0 to 10 frame delay or to delay the de-embedded audio with respect to the video and compensate for any delay between the incoming video and audio signals. The number of inputs will depend on the type of piggyback(s) and sub-board fitted. Screen grabs below show two different configurations.

	Present	Frame & user Match video frame delay	User delay
Front Aip C1+C2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="text"/>
Front Aip C3+C4	<input checked="" type="checkbox"/>	<input type="text"/>	<input checked="" type="checkbox"/>

3G-AIP2 piggyback fitted in front position


	Present	Frame & user Match video frame delay	User delay
Front Diop C1+C2	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="text"/>
Front Diop C3+C4	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Front Diop C5+C6	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="text"/>
Front Diop C7+C8	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="text"/>
Rear Diop C9+C10	<input type="checkbox"/>	<input type="text"/>	<input checked="" type="checkbox"/>
Rear Diop C11+C12	<input type="checkbox"/>	<input type="text"/>	<input checked="" type="checkbox"/>
Rear Diop C13+C14	<input type="checkbox"/>	<input type="text"/>	<input type="text"/>
Rear Diop C15+C16	<input type="checkbox"/>	<input type="text"/>	<input type="text"/>

DIOP4 piggyback fitted in front and rear positions

Present	On if the audio channel pair is present.
Match video frame delay	For each channel pair, select to enable delay to match the video frame delay set by the <i>Delay & output</i> controls.
User delay	For each channel pair, select to enable the variable delay set by the <i>User delay</i> control. For PCM signals this is -20 to +400mS. <i>N.B. Negative values of delay can only be set if 'Frame Delay' is also enabled for that channel and at least one frame of video delay selected.</i>

User delay

Set the delay value for de-embedded and external audio signals.




PCM audio (mS)

Set the delay value between -20 to +400mS for all channel pairs (de-embedded or discrete) with the 'User delay' control selected. See [Discrete input delay](#).

AES I/O configure

Configure the optional DIOP4 piggyback AES I/O channels as input or output.

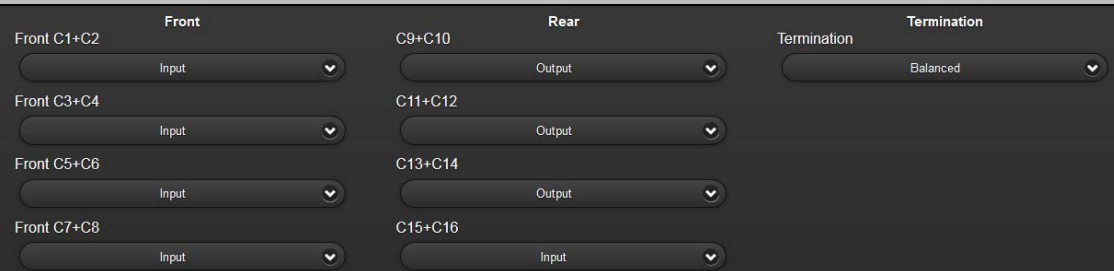


Front/Rear Channel Pair



DIOP4 piggybacks can be configured as either inputs or outputs for each channel pair. For all fitted DIOP4 piggybacks, set the selected AES channel pair to be input or output.

Termination





Set those AES channel pairs selected as inputs to be balanced or unbalanced. The correct rear module must be used for either option.

4.6 Audio Router

Embedded output router

Select the channels that will be embedded into the output video. In addition to the already embedded audio channels, additional or alternative audio sources are available for selection depending on the optional piggyback boards fitted. The screen grab below shows a DIOP4 piggyback in the front and rear positions giving a potential of 16 external AES inputs.

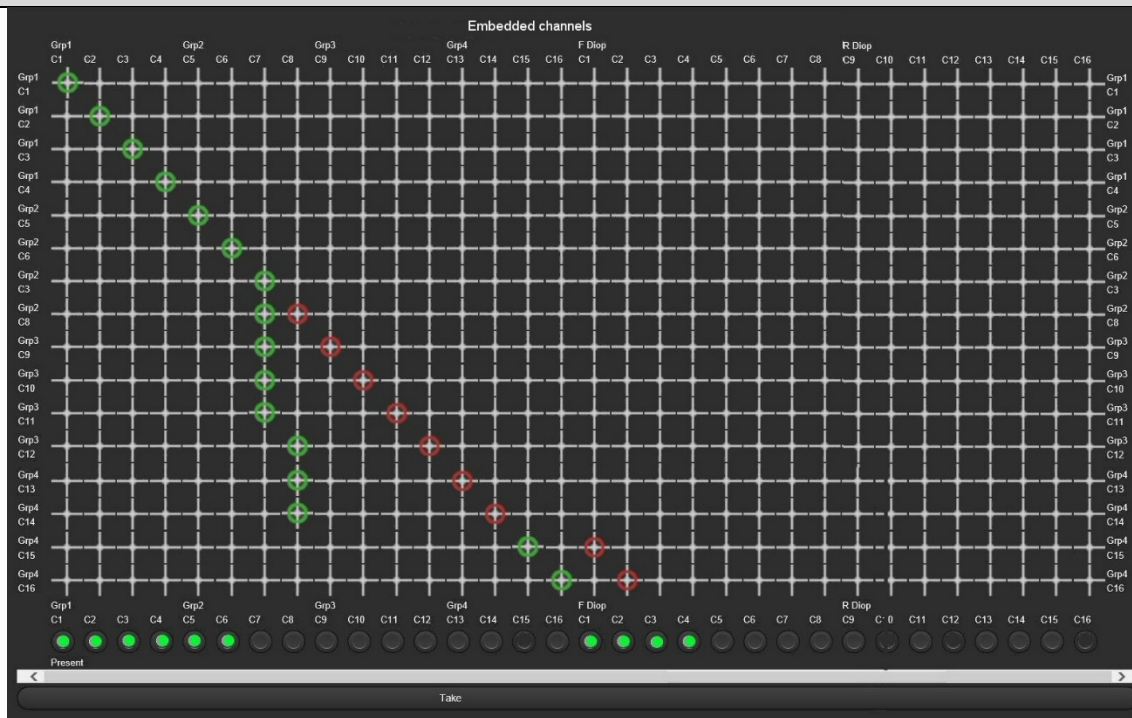

Embedded channels


Displays current selections as green circles, and pre-selected crosspoints as red circles. Pre-selected crosspoints will be routed when the 'Take' button is pressed. The inputs are shown along the top of the matrix and are available to be routed to the embedded channels shown on the left hand side. The example above has 16 de-embedded inputs Grp1-Grp4, C1-C16 and 16 external AES inputs 'F Diop' and 'R Diop' C1-C16.

Different piggybacks will show alternative router inputs. Clicking on the intersection of the input and output will show a red circle which will change green when the 'Take' control is selected. All crosspoints can be pre-selected. The screen grab above shows de-embedded inputs C8-C14 preselected to embedded channels C8-14 and front DIOP4 channels C1 and C2 pre-selected to embedded channels C15 and C16.


Take	Make all pre-selected crosspoints in one go.
Present	On if audio channel is present.

Discrete output router

Select the channels that will be output as AES or analogue signals. This menu is only available when a DIOP4 or 3G-AOP2 piggyback is fitted. The number of output channels available for routing will depend on the number and type of piggybacks fitted. The screen grab below shows a single DIOP4 piggyback in the front position configured as all outputs.

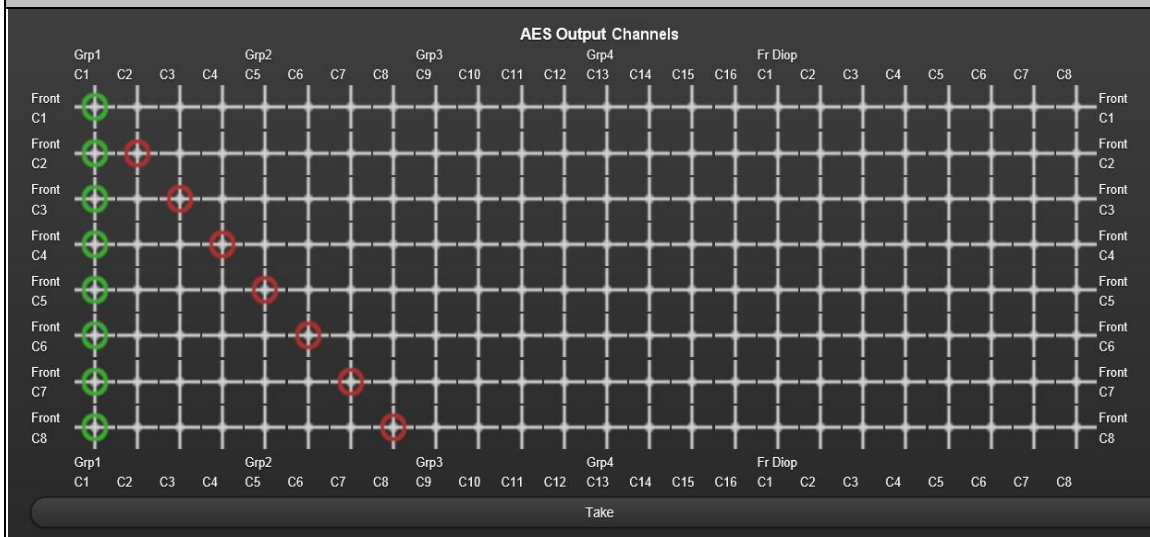

AES Op Channels

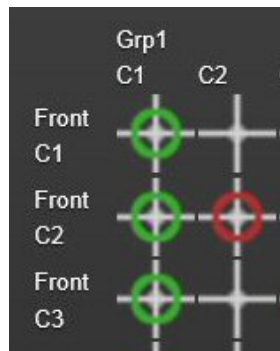

Display current selections as green circles and pre-selected crosspoints as red circles. Preselected crosspoints will be routed when the 'Take' button is pressed. The inputs are shown along the top of the matrix and are available to be routed to the AES output channels shown on the left hand side. The screen grab above has a DIOP4 piggyback fitted in the front position configured as all outputs (C1-8).

Clicking on the intersection of the input and output will show a red circle which will change green when the 'Take' control is selected. All crosspoints can be pre-selected. The screen grab above shows de-embedded inputs 2-8 preselected to front DIOP4 channels C2-C8.

Take Switch all pre-selected crosspoints in one go.

Mute & group enable

Mute embedder output and AES and analogue outputs; enable embedder groups and select embedder encoding mode. The screen grab below shows a DIOP4 configured as outputs and a 3G-AOP2, giving a total of 12 audio outputs.

Embedded channels	Mute	Mutes	AES & Analog Op mutes	Output enable
	Embed mute		Mute	
Group 1 C1	<input type="checkbox"/>	C1	<input type="checkbox"/>	<input checked="" type="checkbox"/> Group 1
Group 1 C2	<input type="checkbox"/>	C2	<input type="checkbox"/>	<input checked="" type="checkbox"/> Group 2
Group 1 C3	<input type="checkbox"/>	C3	<input type="checkbox"/>	<input checked="" type="checkbox"/> Group 3
Group 1 C4	<input type="checkbox"/>	C4	<input type="checkbox"/>	<input type="checkbox"/> Group 4
Group 2 C5	<input type="checkbox"/>	C5	<input type="checkbox"/>	Embedder mode
Group 2 C6	<input checked="" type="checkbox"/>	C6	<input type="checkbox"/>	SMPTE
Group 2 C7	<input checked="" type="checkbox"/>	C7	<input type="checkbox"/>	
Group 2 C8	<input checked="" type="checkbox"/>	C8	<input type="checkbox"/>	
Group 3 C9	<input checked="" type="checkbox"/>	C9	<input type="checkbox"/>	
Group 3 C10	<input checked="" type="checkbox"/>	C10	<input type="checkbox"/>	
Group 3 C11	<input type="checkbox"/>	C11	<input checked="" type="checkbox"/>	
Group 3 C12	<input type="checkbox"/>	C12	<input checked="" type="checkbox"/>	
Group 4 C13	<input type="checkbox"/>			
Group 4 C14	<input type="checkbox"/>			
Group 4 C15	<input type="checkbox"/>			
Group 4 C16	<input type="checkbox"/>			

Embed mute

Select to mute embedder output channels.

AES & Analog Op mutes

Mute AES and analogue output audio. AES outputs only available if a DIOP4 piggyback is fitted. Analogue audio outputs only available if a 3G-AOP2 piggyback fitted.

Output enable

Select to enable embedder output for that group.

Embedder mode



Select either SMPTE or Sony embedder format (for SD video only).

4.7 Presets, default, alarms

Presets

Up to 16 user-defined configurations may be stored and recalled remotely by VisionWeb. Presets store the board setup data including operating mode card status. The presets are numbered 1-16.

Store/Recall

Store

5

Preset select
▼

Recall

Preset select	<div style="border: 1px solid #333; background-color: #333; color: white; padding: 2px;"> <div style="background-color: #007bff; color: white; padding: 2px; text-align: center;">1</div> <div style="background-color: #333; color: white; padding: 2px; text-align: center;">2</div> <div style="background-color: #333; color: white; padding: 2px; text-align: center;">3</div> <div style="background-color: #333; color: white; padding: 2px; text-align: center;">4</div> <div style="background-color: #333; color: white; padding: 2px; text-align: center;">5</div> <div style="background-color: #333; color: white; padding: 2px; text-align: center;">6</div> <div style="background-color: #333; color: white; padding: 2px; text-align: center;">7</div> <div style="background-color: #333; color: white; padding: 2px; text-align: center;">8</div> <div style="background-color: #333; color: white; padding: 2px; text-align: center;">9</div> <div style="background-color: #333; color: white; padding: 2px; text-align: center;">10</div> <div style="background-color: #333; color: white; padding: 2px; text-align: center;">11</div> <div style="background-color: #333; color: white; padding: 2px; text-align: center;">12</div> <div style="background-color: #333; color: white; padding: 2px; text-align: center;">13</div> <div style="background-color: #333; color: white; padding: 2px; text-align: center;">14</div> <div style="background-color: #333; color: white; padding: 2px; text-align: center;">15</div> <div style="background-color: #333; color: white; padding: 2px; text-align: center;">16</div> </div>	<p>Store or recall TANDEM10-VF's configuration from one of 16 memory locations.</p>
Store	Store the current configuration in the selected preset memory.	
Recall	Recall a configuration from the selected memory. This will overwrite the current TANDEM10-VF configurations.	

Card default

Reset the board to its default settings.

Card defaults

Default exc presets

Default inc presets

Default exc presets	Reset the board to default settings but leave preset memories unaffected.
Default inc presets	Reset the board to default settings and erase preset memories.

Alarm delays

Set the time that an alarm condition should be present before indicating a fault.
Set the audio level that indicates a 'silent' condition.

**Video black (seconds),
Video frozen (seconds),
Audio silence (seconds)**

Set the time that the alarm condition must be present before a fault indication. For an audio 'silence' fault, the audio level must be consistently below the threshold set by the 'Audio silence level' control (below) for the period set by the 'Audio silence' control.

Audio silence level

- 48 dBFS
- 54 dBFS
- 60 dBFS
- 66 dBFS
- 72 dBFS
- 78 dBFS
- 84 dBFS
- 90 dBFS

Select the level that, below which, the audio is considered 'silent' from -90dBFS to -48dBFS.

4.8 'Live' button

In the top right hand corner of the VisionWeb GUI there is an icon labelled 'Live'. Clicking on this button will display the following menu:



Live	With the 'Live' option selected, any changes to any of the controls will affect the output of TANDEM10-VF as normal.
Preset 1 edit	Selecting any of the preset edit options, from Preset edit 1 to Preset edit 16, will only edit the stored settings of the selected preset memory, and NOT affect the immediate output.
Preset 2 edit	
Preset 3 edit	Selecting any of the preset edit options will cause TANDEM10-VF controls to initially reflect the values stored in that preset memory.
Preset 4 edit	
Preset 5 edit	Deselecting that preset will cause any changes made to controls to be stored in that preset memory, to be recalled from the Presets menu at a later time.
Preset 6 edit	
Preset 7 edit	
Preset 8 edit	
Preset 9 edit	
Preset 10 edit	
Preset 11 edit	
Preset 12 edit	
Preset 13 edit	
Preset 14 edit	
Preset 15 edit	
Preset 16 edit	

5 Troubleshooting

5.1 Card edge monitoring

The green LED on the front edge of the card provides power rail monitoring. The red LED, if fitted, currently has no function.



5.2 Basic fault finding guide

- ❏ **Power OK LED not illuminated:** Check that the frame PSU is functioning – refer to the 'Vision' frame manual for detailed information.
- ❏ **There is no output:** Check that a valid input is present and that any cabling is intact. Check that the 'Fibre enable' menu is set correctly.
- ❏ **The video output exhibits jitter:** Check that the input SDI stability is within normal limits.
- ❏ **The card no longer responds to front panel control:** Check that the card is seated correctly and that the Power OK LED is lit. Check if the control panel can control another card in the same rack. If necessary reset the card.
- ❏ **Resetting the card:** If required, the card may be reset by removing the card from the rack and then re-inserting it. It is safe to re-insert the card whilst the rack is powered. Any previous configuration will be retained.

6 Specification

General

Dimensions	96mm x 325mm card with connector.
Weight	180g with no piggybacks fitted; 220g with two piggybacks fitted.
Power consumption	TANDEM10-VF – 10 Watts. 3G-AIP2 – 2 Watts; 3G-AOP2 – 2 Watts; DIOP4 – 1 Watt. FIP-VF – 0.6 Watts; FOP-VF – 0.6 Watts; FIO-VF – 1 Watt.

Inputs

Video	HD or SD SDI 270 Mb/s to 2.970 Gb/s serial digital compliant to SMPTE 259, SMPTE 292-1 and SMPTE 424/425-A. Cable Equalisation: 3G (2.970Gb/s) – 100 metres, Belden 1694A or equivalent. HD (1.485Gb/s) – 140 metres, Belden 1694A or equivalent. SD (270Mb/s) >250 metres, Belden 8281 or equivalent. Automatic de-embedding to SMPTE 272M or SMPTE 299M. LC optical input.
Video standards supported	1080p 50/59.94, 1080i 50/59.94, 720p 50/59.94, 1080psf 23.98/24, PAL, NTSC. Input format auto selected.
Audio	Up to eight 24 bit stereo pairs (total of eight inputs and outputs). AES3 110 ohm or HiZ (balanced) D-Type, or AES3-id (unbalanced) 75 ohm BNC. Synchronous 48kHz audio to video.

Outputs

Video	Serial output: 270Mb/s to 2.970Gb/s serial compliant to SMPTE 259, SMPTE 292-1 and SMPTE 424/425-A. Output follows the input format. Audio is embedded to SMPTE 272M or SMPTE 299M. LC optical outputs.
Audio	Up to eight 24 bit stereo pairs (total of eight inputs and outputs). AES: 110 ohm balanced D-Type or 75 ohm unbalanced BNC.

Rear Module I/O

- VR02 One BNC video input and three BNC video outputs, plus 110 ohm balanced audio I/O on a high density D-Type.
- VR12 One BNC video input, two BNC video outputs and dual LC optical I/O, plus 110 ohm balanced audio I/O on a high density D-Type.
- VR13 One BNC video input, three BNC video outputs and dual LC optical I/O, plus eight 75 ohm unbalanced AES audio I/O on BNC.

Delays

- Audio Delay Adjustable audio delay from -20 to 400ms on each channel. Delay is either on or off for any given channel.
- Delay through board Selectable ten frame video delay can be used to compensate for audio delays.

Audio

- Audio Replace Routing of input audio together with audio or Dolby E from up to four de-embedded groups present on video input to any channel of up to four output embedder groups. HANC cleaning means that there is no remnant of the original version of old groups. If group 1 is replaced there is not an old group 1 with the "mark for deletion" flag set. Instead there is just the new modified group 1.
- Audio Processing Gain level adjustment on each channel between +18dB and -18dB in 0.1dB steps with 0dB calibration.
- Mute.
- Stereo to mono conversion.

Misc.

- Auxiliary data Auxiliary data passed unless set to blank.
- Presets Store and recall of 16 presets.

Input fail output

- Type: Black or blue.

Control

- Remote: Monitor and control from 'Vision' frame front panel, VisionPanel remote panel and VisionWeb Control which is available via the web server on the frame and allows operation using a standard web browser on a computer, tablet or phone.
Complimentary SNMP control and monitoring via frame CPU and Ethernet connection.

7 Appendix 1

7.1 Menu Structure

Operators of a 'Vision' frame active front panel can use the following tree to help negotiate the TANDEM10-VF menus. Items shown in red are tabs in VisionWeb and panels in VisionPanel, and items shown in grey are menus in both.

Note that some of these menus will change according to the optional boards fitted – for example, references to 'Front' or 'Rear' channels will only appear if the appropriate piggyback is fitted.

